
DR BRASS APPROVED GATE VALVE



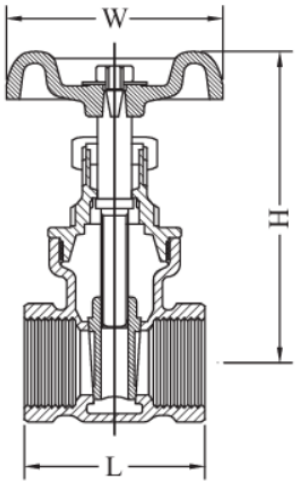

SPECIFICATIONS

- Size range: 15mm (1/2") – 100mm (4")
- F/F BSP Thread AS1722.1
- Watermark Approved DR Brass
- Max Working temperature 180°C
- Cold Working Pressure 2500kPA
- Applications – Potable water, low pressure heating, water works, irrigation, air systems and low-pressure steam.

DIMENSIONS (MM)

Imperial Size	L	H	W	Approx Kg/PC
1/2	57	77	54	0.45
3/4	62	90	59.5	0.55
1	72.5	103.5	71.5	0.85
1 ¼	82.5	122	71.5	1.15
1 ½	85.5	134	80	1.6
2	98	160	99.5	2.75
2 ½	105	198	117	3.5
3	117	230	140	5.08
4	135	285	140	9.11

MATERIAL LIST

Part	Material
Body	DR Brass
Bonnet	DR Brass
Wedge	DR Brass
Stem	DR Brass
Hand Wheel	Ductile iron
Packing	PTFE Teflon

Allflex Industrial PTY LTD
sales@allflexindustrial.com.au
(08) 9452 0422