
SPRING NON-RETURN VALVE

'E' Type Check Valve



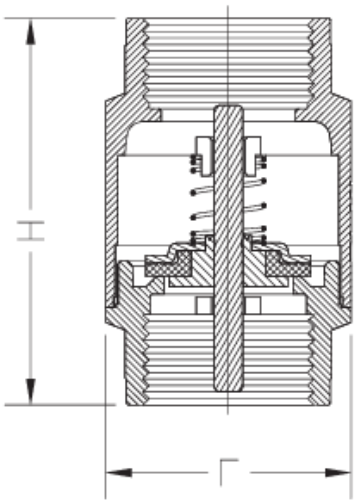

SPECIFICATIONS

- Size range: 10mm (3/8") – 100mm (4")
- F/F BSP Thread
- Max Working Temperature 110°C
- Applications – Can be fitted in horizontal, vertical or oblique position. Suitable for Hot/Cold water, Compressed Air & Oils.

DIMENSIONS (MM) & PRESSURE RATING (KPA)

Imperial Size	H	L	Approx Kg/PC	kPa
3/8	55	34.5	0.17	2482
1/2	58.5	34.5	0.19	2482
3/4	63	42	0.27	2482
1	74	48	0.43	2482
1 1/4	83	60.5	0.54	1793
11/2	93	71	0.87	1793
2	101	87	1.32	1793
2 1/2	120	118	2.62	1172
3	139	139	4.21	1172
4	158.5	154	6.13	1172

MATERIAL LIST

Part	Material
Body	Brass CW 617N
Internal Seat	Stainless Steel Plate AISI 304 fitted with NB 60 SH/A.
Cover Plate	Brass CW 614N
Rod	Brass CW 614N
Spring	Stainless Steel AISI 302

WORKING TEMPERATURES

	Min	Max
Air	-20°C	110°C
Water	0°C	90°C
Gas	-20°C	60°C

Allflex Industrial PTY LTD
sales@allflexindustrial.com.au
(08) 9452 0422