
BRASS BALL VALVE

F/F – Full Bore - ¼ Turn



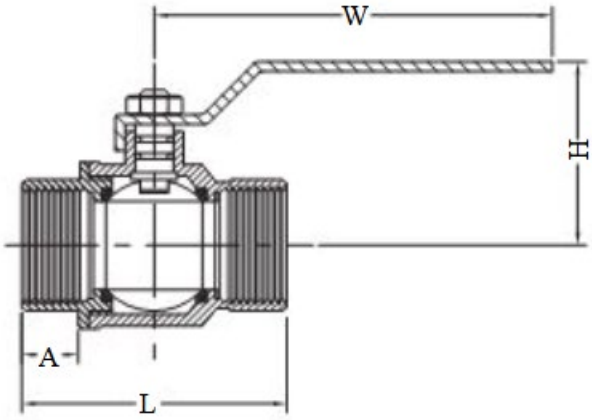

SPECIFICATIONS

- Size range: 8mm (1/4") – 100mm (4")
- AS1722.2 Female BSP thread
- Max Working Temperature 150°C
- Cold Working Pressure 2500kPa
- Nickel Plate Brass
- Applications – Ideal for hot and cold water (non-potable), various oils, chemicals and compressed air.

DIMENSIONS (MM)

Imperial Size	L	H	W	A	Approx Kg/PC
1/4	49.5	35	85	12	0.16
3/8	49.5	35	85	16	0.14
1/2	60	39	95	16.5	0.2
3/4	66.5	43	115	18	0.3
1	76	59.5	115	19.5	0.43
1 1/4	92.8	63	125	23	0.74
1 1/2	100.5	77	180	23	1.1
2	122	89	180	27	1.72
2 1/2	151	112	257	30	3.48
3	174	120	301	37	5.02
4	212	144	340	40	8.4

MATERIAL LIST

Part	Material
Body	Brass (Nickel Plated)
Seat Retainer	Brass (Nickel Plated)
Seat	P.T.F.E
Ball	Brass (Chromium Plated)
Stem	Brass
Gland	Brass
Packing	Viton (Double O-Ring
Lever	Stainless Steel (Plastic Coated)
Lever Retaining Nut	Brass (Nickel Plated)

Allflex Industrial PTY LTD
sales@allflexindustrial.com.au
(08) 9452 0422