
AGA APPROVED BALL VALVE

F/F Thread – T Handle



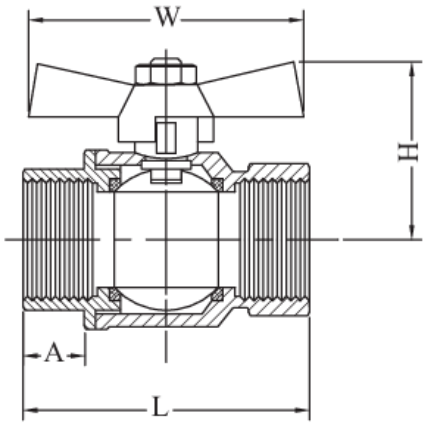

SPECIFICATIONS

- Size range: 8mm (1/4") – 25mm (1")
- F/F BSP Thread AS1722.1
- Max Working Temperature 60°C
- Cold Working Pressure 2500kPA
- AGA Approved – AGA6017
- Applications – For low to medium gas applications. Can also be used for certain chemicals and oils.

DIMENSIONS (MM) & PRESSURE RATING (KPA)

Imperial Size	L	H	W	A	Approx Kg/PC
1/4	49.5	35	48	12	0.16
3/8	49.5	35	48	16	0.14
1/2	60	35	55	16.5	0.2
3/4	66.5	40	55	18	0.3
1	76	43	72	19.5	0.43

MATERIAL LIST

Part	Material
Body	Brass (Nickel Plated)
Seat Retainer	Brass (Nickel Plated)
Seat	P.T.F.E
Ball	Brass (Chromium Plated)
Stem	Brass
Gland	Brass
Packing	Viton (Double O-Ring)
Lever	Stainless Steel
Lever Retaining Nut	Brass (Nickel Plated

Allflex Industrial PTY LTD
sales@allflexindustrial.com.au
(08) 9452 0422